




Connecting the gateway (ZGD)

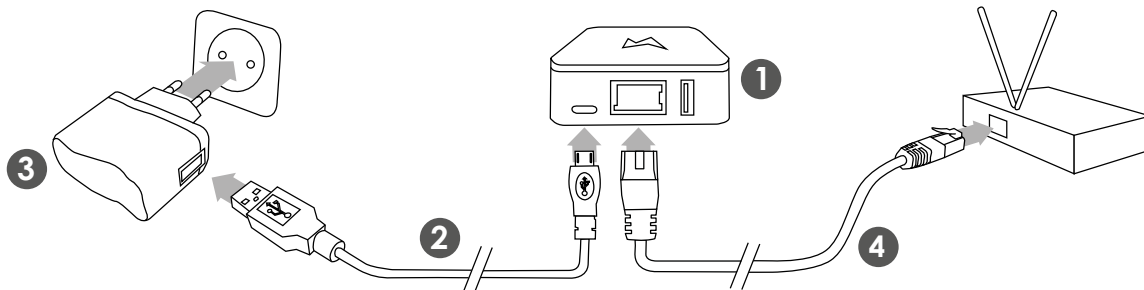

Connect the gateway (1) to a wall socket with the USB-power supply cable (2) and plug (3). Then connect the ethernet cable (4) to a free port on your internet modem.

Ensure that the gateway is suspended high and that there is only one wall between the gateway and the location of the meter. It is even better to install the gateway in the same room as the meter.

After installation, the gateway will automatically start to connect to the online portal. The progress is indicated by colors.

As soon as the gateway lights up blue continuously, after about 1 to 2 minutes, the connection with the portal has been established.

Is the gateway unable to connect to the online portal?

Red flashing	the ethernet cable is not connected (properly)
Green flashing	gateway is waiting for local IP address (DHCP)
Blue flashing	no access to internet; check with a laptop whether you can connect to the internet with this cable

More information? Log in on your online portal.

v. 0.3